


チャンネル

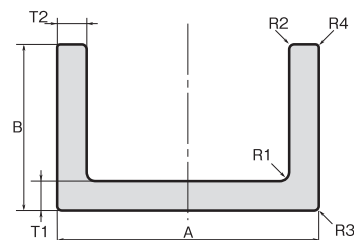

製作区分	型番	形状寸法 (mm)								断面積 (mm ²)	単位質量 (kg / m)	材質区分			
		A	B	T 1	T 2	R 1	R 2	R 3	R 4			I	II	III	IV
A	X 97001	149.5	30	1.5	1.5	—	—	—	—	310	0.836		○		
A	X 97010	150	20	2	2	—	—	—	—	372	1.004		○		
N	X 20004	25	32	4	3.5	2	—	—	—	298	0.805		○		
N	S 96340	30	55	5	6	4	—	—	—	757	2.044		○	○	○
N	X 30002	33	30	3	4	3	—	—	—	319	0.849			○	○
N	X 30010	36	48	3	3	—	0.5	0.5	0.5	377.7	1.02		○		
N	X 30006	39.5	30	2.5	2.5	1	1	—	—	236	0.637		○		
N	S 96131	40	20	3	3	—	—	—	—	222	0.599		○	○	○
N	X 40004	40	25	4	4	3	—	—	—	331.9	0.896			○	○
N	S 96240	50	20	4	3	3	—	—	—	300	0.798			○	○
N	X 57016	50	25	3	3	3	—	—	—	285.9	0.772		○		
N	S 96171	50	25	3	4	4	—	—	—	333	0.886		○	○	○
N	S 96127	50	30	3.3	4.2	4	—	—	—	396	1.069		○	○	○
N	S 96414	50	44	6.5	6.5	3	—	—	—	816	2.203		○	○	○
N	S 96320	50	60	5	5	3	3	—	—	800	2.16		○	○	○
N	S 96205	51	41	4	4	3	—	—	—	504	1.341			○	○
N	S 96033	52	26	2.5	2.5	6	—	—	—	263	0.71		○	○	○
N	S 96211	60	40	4.5	4.5	4.5	2.3	—	—	596	1.609		○	○	○
N	S 35522	60	50	6	6	3	2	4	2	882	2.381		○	○	○
N	S 96256	65	40	4	4	4	—	—	—	555	1.499			○	○
N	S 96302	75	40	5	5	8	—	—	—	753	2.033		○	○	○
N	S 96417	75	40	6	6	3	2.5	—	—	859	2.319		○	○	○
N	S 96615	75	40	8	8	8	4	—	—	1133	3.059		○	○	○
N	S 96230	75	50	4	4	2	—	2	—	668	1.804		○	○	○
N	S 96425	76	50	6	8	6	—	—	—	1176	3.175		○	○	○
N	S 96225	80	40	4	4	5	—	—	—	619	1.671		○	○	○
N	S 96404	80	40	6	6	6	3	—	—	900	2.43		○	○	○
N	S 96409	80	42	6	6	2	—	—	—	914	2.468			○	○
N	S 96308	80	80	5	5	5	—	—	—	1161	3.135		○	○	○
N	S 96341	84.1	30	5	5	4	—	—	—	677	1.828		○	○	○
N	X 90031	90	50	5	5	5	—	—	—	911	2.423			○	○
N	S 96327	100	25	5	5	3	3	0.5	0.5	700	1.89		○	○	○
N	S 96203	100	50	4	4	4	2	—	—	773	2.087		○	○	○
N	S 96331	100	50	5	5	5	—	—	—	961	2.595		○	○	○
N	S 96606	100	65	8	8	6.5	3	—	—	1726	4.66		○	○	○
N	X 90015	100	100	6	6	2	0.5	0.5	0.5	1729	4.668		○		
N	X 90054	100	100	10	10	10	5	0.5	0.5	2832	7.646		○		
N	X 90063	120	120	8	8	3	—	—	—	2756	7.441		○		○
N	S 96617	120	100	8	12	10	0.5	0.5	0.5	3211	8.541			○	○
N	S 96405	125	65	6	8	6	3	—	—	1706	4.606		○	○	○

角・平角

等辺アングル

不等辺アングル

チャンネル

I・H型

等辺角管

不等辺角管

S 形材

T 形材

パイプ

六角

角・平角	製作区分	型番	形状寸法 (mm)								断面積 (mm ²)	単位質量 (kg / m)	材質区分			
			A	B	T 1	T 2	R 1	R 2	R 3	R 4			I	II	III	IV
等辺アングル	N	S 96432	125	65	6	9	8	4	—	—	1833	4.949		○	○	○
	N	X 90016	125	75	6	6	10	4	—	—	1614	4.358		○		
不等辺アングル	N	S 96430	135.25	80	6	6	10	2	—	2	1739	4.626			○	○
	N	S 96329	150	75	5.8	5	5	2.5	—	—	1570	4.239		○	○	○
チャンネル	N	S 96422	150	75	6	6	10	4	—	—	1764	4.763		○	○	○
	N	S 96403	150	75	6.5	10	6.5	3.25	—	—	2359	6.369		○	○	○
I・H型	N	S 96832	150	75	10	10	10	5	—	—	2832	7.533		○	○	○
	N	S 96803	150	75	10	12	10	5	—	—	3092	8.348		○	○	○
等辺角管	N	S 96704	150	90	9	14	15	7.5	0.5	0.5	3690	9.9633		○	○	○
	N	X 90032	160	100	10	10	—	—	—	—	3400	9.044			○	○
不等辺角管	N	X 90042	190.5	70	7	10	10	—	—	—	2636	7.118		○		○
	N	S 96817	200	75	14	14	14	7	—	—	4571	12.342		○	○	○
パイプ	N	S 96502	200	80	7.5	7.5	12	6	—	—	2634	7.112		○	○	○
	N	S 96512	200	70	7	10	11	—	—	—	2712	7.322		○	○	○
六角	N	S 96509	200	70	7	10	11	5.5	—	—	2699	7.287		○	○	○
	N	X 90008	200	80	10	12	7	2	2	2	3696	9.831			○	○
T形材	K	S 96618	200	90	8	13.5	11	5.5	—	—	3853	10.403		○	○	○
	K	S 96708	200	90	9	13.5	9	4.5	—	—	3989	10.77		○	○	○
パイプ	K	S 96830	200	100	10	12	8	—	—	—	4188	11.308		○	○	○
	K	S 96835	200	150	16	16	18	6	—	—	7612	20.552		○	○	○
パイプ	N	X 90009	250	80	10	12	7	2	2	2	4196	11.161			○	○
	N	S 96831	250	90	12	15	12	6	—	—	5386	14.542		○	○	○
パイプ	N	X 90025	300	70	7	10	7	2	2	2	3376	8.98			○	○
パイプ																